

Application Reference No. 28/2022-23/96

(यह परीक्षण रिपोर्ट 31/07/2028 तक वैध है / THIS TEST REPORT IS VALID UPTO 31/07/2028)



Make of Agricultural Tractor : TAFE
Model : MF 244 DI 4WD DT
Manufactured by : M/s Tractors and Farm Equipment Limited,
Post Box No. 3302, Old – 35 (New-77)
Mahatma Gandhi Road, Nungambakkam,
Chennai – 600 034 (T.N.)



भारत सरकार

कृषि एवं किसान कल्याण मंत्रालय
(कृषि एवं किसान कल्याण विभाग)

GOVERNMENT OF INDIA
MINISTRY OF AGRICULTURE AND FARMERS WELFARE
(DEPARTMENT OF AGRICULTURE & FARMERS WELFARE)

केन्द्रीय कृषि मशीनरी प्रशिक्षण एवं परीक्षण संस्थान
ट्रैक्टर नगर, बुदनी (म.प्र.) 466 445

CENTRAL FARM MACHINERY TRAINING & TESTING INSTITUTE
TRACTOR NAGAR, BUDNI (M.P.) 466 445
(An ISO 9001:2015 Certified Institute)

T-1759/2290/2023	TAFE, MF 244 DI 4WD DT TRACTOR - INITIAL COMMERCIAL TEST
	THIS TEST REPORT IS VALID UPTO: 31/07/2028

IMPORTANT INFORMATION

The Government of India, Ministry of Agriculture and Farmers' Welfare has directed, vide a OM No. 13-17/2021-M&T(I&P) dated 28.07.2022, that since 15th August, 2022, only mandatory tests will be carried out on a tractor unless applicant has expressly requested for optional tests as well, mentioned in the above captioned OM.

In the instant case, there is no request from the applicant to carry out the optional tests hence only Mandatory Tests, as given below, have been conducted and reported in this report: -

1. PTO performance
2. Hydraulic performance
3. Drawbar performance
4. Brake performance

Month: July	Test Report No.: T-1759/2290/2023	Year: 2023
-------------	-----------------------------------	------------



GOVERNMENT OF INDIA
CENTRAL FARM MACHINERY TRAINING & TESTING INSTITUTE
TRACTOR NAGAR, BUDNI (MADHYA PRADESH) 466445, INDIA

E-mail: fmti-mp@nic.in

Web site: <http://www.fmttibudni.gov.in>

Telephone: 07564-299003

CENTRAL FARM MACHINERY TRAINING AND TESTING INSTITUTE – BUDNI	Page 2 of 34
---	--------------

T-1759/2290/2023	TAFE, MF 244 DI 4WD DT TRACTOR - INITIAL COMMERCIAL TEST
	THIS TEST REPORT IS VALID UPTO: 31/07/2028

[C]	Tractor manufacturer's name and address	:	M/s Tractors and Farm Equipment Limited, Post Box No. 3302, Old – 35 (New-77) Mahatma Gandhi Road, Nungambakkam, Chennai – 600 034 (T.N.)
[D]	Location of tractor assembly	:	i) M/s Tractors and Farm Equipment Limited Kalladipatti Plant, 10/205, Kalladipatti (PO), Pin – 624 201, Dindigul Dist., (T.N.) ii) M/s Tractors and Farm Equipment Limited Doddaballapur Plant Plot No. – 1, KIADB Industrial Area, Doddaballapur, Bengaluru - 561 203 (KA)
[C]	Submitted for test by (Applicant)	:	The Manufacturer
[C]	Selected for test by	:	The Ministry vide OM No. 13-17/2021 - M&T (I&P) dated 28.07.2022, has allowed the applicant to submit the test sample directly to the Institute without requiring any random selection for Initial Commercial Testing. Thus, the applicant directly submitted the test sample to the Institute for test.
[D]	Place of running-in	:	At manufacturer's works
[D]	Duration of running-in:		
	-Engine	:	12
	-Transmission	:	16
[C]	Location of test	:	Government of India, Central Farm Machinery Training and Testing Institute, P.O. - Tractor Nagar, BUDNI – 466445 (M.P.), INDIA

1. SPECIFICATIONS OF TRACTOR

1.1 Identification:

1.1.1 Denomination

[C]	Make of tractor	:	TAFE
[C]	Model (trade name)	:	MF 244 DI 4WD DT
[C]	Type	:	4WD, Standard Agricultural Tractor.
[C]	Month & year of manufacture	:	06 & 23
[D]	Country of origin	:	India

1.1.2 Numbers:

[D]	1 st Serial No. of prototype	:	MEA84995CM2355186
[C]	Serial No.	:	MEA84995FP2489160

1.2 Engine:

[D]	Manufacturer's address	:	(i) Simpson & Co. Ltd., No. 861, 862, Anna Salai, Bordar Thottam, Triplicane, Chennai – 600 002 (ii) Simpson & Co. Ltd., No.1 Kaliya Pillai Street, Mathuaim Pettai road, Kumbakonam, Tamilnadu – 612 001 (iii) Simpson & Co. Ltd., Simpson, Sembiam Estate, Perambur, Chennai – 600 011
[C]	Make	:	Simpson & Co. Ltd.
[C]	Model	:	T III A S325.1-F2.6
[C]	Type	:	Four stroke, liquid cooled, direct injection, diesel engine.
[C]	Serial No.	:	S325.1N38677

T-1759/2290/2023	TAFE, MF 244 DI 4WD DT TRACTOR - INITIAL COMMERCIAL TEST
	THIS TEST REPORT IS VALID UPTO: 31/07/2028

6. SUMMARY OF OBSERVATIONS, COMMENTS & RECOMMENDATIONS

6.1 On the basis of test conducted the performance results have been summarized as evaluative (mandatory) / Non-evaluative (Non-mandatory) parameters applicable for Qualifying Minimum Performance criteria as per Clause-4 (Table-1) of **IS: 12207-2022** for acceptance of the tractor for the purpose of subsidies/NABARD financing are summarized as under:

S. No.	Characteristic	Category (Evaluative / Non Evaluative)	Requirements as per IS: 12207-2022	Values declared by the applicant/ (D) Requirement (R)	As observed	Whether meets the requirements (Yes/No)
1	2	3	4	5	6	7
MANDATORY TESTS: (As per Ministry's Office Memorandum No. 13-17/2021-M&T (I&P) dated 28th of July, 2022).						
6.1.1	PTO Performance:					
a)	Maximum power under 2 h test, (kW) (Natural ambient condition)	Evaluative	Declared value to be achieved with a tolerance of: $\pm 5\%$ for PTO power and or engine power > 26 kW. $\pm 10\%$ for PTO power and or engine ≤ 26 kW.	27.2 (D)	27.0	Yes
b)	Power at rated engine speed, (kW)	Non Evaluative	-do-	27.2 (D)	26.6	Yes
c)	Specific fuel consumption corresponding to maximum power, (g/kWh)	Evaluative	Should not be more than 10% of declared value.	265 (D)	245	Yes
d)	Maximum equivalent crankshaft torque, (Nm)	Non-Evaluative	$\pm 8\%$	165.8 (D)	149.7	Yes
e)	Back-up torque, percent	Evaluative	Should be min. 12%	12 (D) 12 (R)	17.8	Yes
f)	Maximum operating temperature, ($^{\circ}$ C):					
	1) Engine oil	Evaluative	The declared value should not exceed the Max value specified by the oil company and the observed value under natural ambient/high ambient condition should not exceed the declaration.	132 (D)	120	Yes
	2) Coolant	Evaluative	Observed value should not exceed the declared value or boiling point of coolant at radiator cap pressure whichever is lower. The boiling point of the coolant at radiator pressure shall be provided by the applicant.	112 (D)	99	Yes
g)	Engine oil consumption, (g/kWh)	Evaluative	Not exceeding 1% of SFC at Max power under natural ambient condition. The value would be based on the test conducted under natural ambient condition	2.45 Maximum (R)	0.47	Yes
h)	Smoke level, m^{-1}	Evaluative	Maximum light absorption coefficient of 3.25 per meter or equivalent BOSCH No. 5.2 or 75 Hatridge value (As per CMVR). Max Smoke level shall be reported out of 6 readings tested as per IS 12062 and observed value should be well within the required limits.	3.25 per meter Maximum (R)	0.17	Yes

T-1759/2290/2023	TAFE, MF 244 DI 4WD DT TRACTOR - INITIAL COMMERCIAL TEST
	THIS TEST REPORT IS VALID UPTO: 31/07/2028

1	2	3	4	5	6	7
6.1.2	Drawbar performance:					
a)	Max. drawbar pull with ballast corresponding to 15 percent wheel slip, (kN)	Non-Evaluative	Minimum 70% of static mass of tractor with ballast.	19.00 (D)	**	Not applicable
b)	Max. drawbar pull with standard ballast corresponding to 15 percent wheel slip, (kN)	Evaluative	In case of tractors having total static mass \geq 1500 kg, Min 70% of static mass of tractor without ballast or with standard ballast, as the case may be. In case of light weight tractors having \leq 1500 kg total static mass of tractor, Min. 65% of static mass of tractor without ballast or with standard ballast, as the case may be.	14.50 (D) 14.35 (R) Minimum	19.57	Yes
c)	Maximum drawbar power with standard ballast, (kW).	Evaluative	Minimum 80 % of PTO power as referred in SI No. i) a) of PTO performance in case of tractors having total static mass > 1500 kg Minimum 75% of PTO power as referred in SI No. i) a) of PTO performance in case of light weight tractors having \leq 1500 kg total static mass of tractor. Minimum 75 % of the engine power as referred in SI No. i) a) of engine performance in case of tractors which do not have a PTO shaft.	22.0 (D) 21.6 (R) Minimum	22.5	Yes
d)	For tractors fitted with air conditioned /heated cabin: Maximum drawbar power without ballast, or with standard ballast as the case may be, kW	Evaluative	Min 70%of PTO power as referred in SI No. i) a) of PTO performance in case of tractors having total static mass > 1 500 kg.	Not fitted	Not fitted	Not applicable
e)	Maximum transmission oil temperature, (°C)	Evaluative	The declared value should not exceed the recommendation by the oil manufacturer. The observed value should not exceed the declared value throughout the drawbar test.	132 (D)	83	Yes
Remark:	**Applicant vide letter no. Nil dated 17.07.2023 has requested not to conduct the ballasted drawbar performance test & ten-hour drawbar test which is allowed as per the additional guideline for testing of tractors as per new regime of testing of tractors vide an OM No. 13-32/2023-M&T (I&P) (FTS-125476) dated 16.05.2023. Accordingly, drawbar performance test under standard ballast condition was conducted only.					

T-1759/2290/2023	TAFE, MF 244 DI 4WD DT TRACTOR - INITIAL COMMERCIAL TEST
	THIS TEST REPORT IS VALID UPTO: 31/07/2028

1	2	3	4	5	6	7	
6.1.3	Power lift and hydraulic pump performance:						
a)	Maximum lifting capacity throughout the range of lift, (kN):						
	1)	At hitch points	Evaluative	Should not be less than 90% of declared value.	16.50 (D) 14.85 (R) Min	17.37	Yes
	2)	With the standard frame	Evaluative	The lift capacity should at least be 24 kg/PTO kW and it should be 21.5 kg/engine kW where the tractor is not provided with a PTO shaft.	7.00 (D) 6.35 (R) Minimum	15.84	Yes
b)	Maximum drop in the height of the point of application of the force after each 5 minutes interval for a total duration of 30 Minutes, (mm)	Non Evaluative	The observed value should not exceed 50 mm.	50 (D) Maximum	250	No	
6.1.4	Brake performance at 25 kmph:						
a)	Maximum stopping distance at a force, equal to or less than 600 N on brake pedal with standard ballast, (m):						
	1)	Cold brake	Evaluative	10	10 (R)	7.34	Yes
	2)	Hot brake	Evaluative	10	10 (R)	7.47	Yes
b)	Whether parking brake is effective at a force of 600 N at foot pedal (s) or 400 N at hand lever	Evaluative	Yes / No	Yes	Yes	Yes	
6.1.5	OPTIONAL TESTS: As the applicant has not applied for any optional tests, therefore no optional tests was conducted.						
6.1.6	Safety features:						
a)	Guards against moving and hot parts	Evaluative	Belt drives, pulleys, silencer, hydraulic pipes [As per IS 12239 (Part2)]	Meets the requirement	Yes		
b)	Lighting arrangement	Evaluative	As per CMVR	Conforms	Yes		
c)	Seating requirements (Tractors having more than 1150 mm rear track width)	Non Evaluative	Should meet the requirements of IS: 12343 (As amended from time to time)	Does not meet the requirement	No		
d)	Technical requirements for PTO shaft	Non Evaluative	Should meet the requirements of IS: 4931 (As amended from time to time)	Meets the requirement	Yes		
e)	Dimensions of three point linkage	Non Evaluative	Should meet the requirements of IS: 4468 (Part-I) (As amended from time to time)	Does not meet the requirement	No		
f)	Specifications of linkage drawbar	Non Evaluative	Should meet the requirements of IS: 12953 (As amended from time to time)	Meets the requirement	Yes		
g)	Swinging drawbar (wherever fitted)	Non Evaluative	Should meet the requirement of IS: 12362 (Part 3) (As amended from time to time)	Not provided	Not applicable		
h)	Audible warning signal on tractor	Evaluative	If tractor travel speed in reverse gear exceeds 20 kmph, an audible warning signal on tractor shall get activated. A sticker to the effect that "operating the tractor beyond 20 kmph speed in reverse gear is not safe" should be prominently displayed.	The audible warning signal has not been provided on tractor	No		

T-1759/2290/2023	TAFE, MF 244 DI 4WD DT TRACTOR - INITIAL COMMERCIAL TEST
	THIS TEST REPORT IS VALID UPTO: 31/07/2028

1	2	3	4	5	6	7		
6.1.7	Labelling of tractors (Provision of labelling plate):							
	1)	Make	Evaluative	Should conform to the requirements of CMVR along-with declared value of PTO in kW, Specific fuel consumption (SFC) corresponding to maximum power in g/kWh and year of manufacture in numerical form <table border="1" style="margin-left: 20px;"><tr><td>MM</td><td>YY</td></tr></table> Digit 01-12 in box No. 1 for MM will represent the month and next two digit in the box No. 2 for YY will represent the year of manufacturing.	MM	YY	TAFE	Yes
	MM	YY						
	2)	Model	Evaluative		MF 244 DI 4WD DT	Yes		
	3)	Month & Year of manufacture	Evaluative		06 & 23	Yes		
	4)	Engine number	Evaluative		S325.1N38677	Yes		
	5)	Chassis number	Evaluative		MEA84995FP 2489160	Yes		
	6)	Maximum PTO power, (kW)	Evaluative		27.2	Yes		
7)	Specific fuel consumption, (g/kWh)	Evaluative	265		Yes			
6.1.8	Literature (Submission to test agency):							
(a)	Operator manual	Evaluative	The printed literature in booklet form should be provided as per IS 8132 and should submit along with the test sample.	Provided	Yes			
(b)	Parts Catalogue	Evaluative		Provided	Yes			
(c)	Workshop/ Service manual	Evaluative		Provided	Yes			
6.1.9	Fitment of Roll Over Protective Structures (ROPS):							
	For tractor having more than 1150 mm rear track width	Evaluative	ROPS should meet the requirement of IS:11821 or OECD code or equivalent International Standard.	Not fitted	Not applicable			
6.1.10	Standard Accessories	Evaluative	Trailer hitch, front tow hook, linkage drawbar should be provided with tractor	Provided	Yes			
6.1.11	Accessories (optional)	Non Evaluative	Ballast weight, if fitted, should meet the requirement of CMVR	Provided	Yes			

6.2 CATEGORY OF BREAKDOWNS / DEFECTS (As per clause 5.0 of IS:12207-2022):					
S. No.	Category of break-downs	Category (Evaluative / Non Evaluative)	Requirements as per IS: 12207-2022	As observed	Whether meets the Requirement (Yes/No)
1.	Critical	Evaluative	There is no 'critical breakdown' during the course of testing.	None	Yes
2.	Major	Evaluative	There are not more than 2 major breakdowns and neither of them should be of repetitive nature.	None	Yes
3.	Minor	Evaluative	There are not more than 5 minor defects during the test and neither of them should of repetitive nature.	None	Yes
4.	Total breakdowns	Evaluative	In no case, the total number of breakdowns should exceed five that is, (2 major + 3 minor) or (1 major + 4 minor) or 5 minor breakdowns.	None	Yes

6.3 Conformity with following IS:

- | | | | |
|-------|--|---|-------------------------|
| i) | Guidelines for declaration of power and specific fuel consumption and labeling of agricultural tractors (First revision) [IS:10273 -1987 (Reaffirmed Year 2019)] | : | Conforms |
| ii) | Agricultural tractors - Rear mounted power take-off - Types 1, 2 and 3 (third revision) [IS:4931-1995 (Reaffirmed Year 2019)] | : | Conforms |
| iii) | Agricultural wheeled tractors – Rear mounted three-point linkage: Part 1 Categories 1, 2, 3 & 4 (fourth revision) [IS:4468(Part-I) – 1997 (Reaffirmed in 2022)] | : | Does not conform |
| iv) | Drawbar for agricultural tractors – Link type [IS 12953:1990 (Reaffirmed Year 2022)] | : | Conforms |
| v) | Agricultural tractors- Operator’s seat technical requirement [IS12343 - 2021] | : | Does not conform |
| vi) | Guide for safety & comfort of operator of agricultural tractors: Part 1 General requirements (first revision): [IS 12239 (Part 1) - 2018] | : | Does not conform |
| vii) | Tractors and machinery for agriculture and forestry – Technical means for ensuring safety Part 2: Tractors (first revision) (IS 12239 (Part 2) 1999) (Reaffirmed Year 2019)] | : | Does not conform |
| viii) | Guide lines for location and operation of operator controls on agricultural tractors and machinery [IS: 8133 - 2021] | : | Does not conform |
| ix) | Tractors and machinery for agriculture and forestry, powered lawn and garden equipment - Symbols for operator controls and other displays Part2 Symbols for agricultural tractors and machinery [IS: 6283(Part-1) - 2006 (Reaffirmed Year 2019) and IS: 6283 (Part-2) – 2007 (Reaffirmed Year 2019)] | : | Does not conform |
| x) | Agricultural Tractors and Machinery-Lighting device for travel on public roads (IS:14683-1999) (Reaffirmed Year 2019)] | : | Conforms |

6.4 Salient Observations:

6.4.1 Laboratory tests:

6.4.1.1 Power lift & hydraulic pump performance test:

During maintenance of lift load test, cumulative drop in the height of lower links was measured as 250 mm against the maximum permissible limit of 50 mm which does not meet the requirement of IS: 12207-2022. Even though this parameter is categorized as ‘non-Evaluative’ as per IS: 12207-2022, yet for the sake of improvement it would be advisable to look into the matter to make it conforming to the requirement.

6.4.1.2 Three-point linkage:

The following parameters does not meet the requirements of IS: 4468 (Part-I) – 1997 and needs to be looked into for necessary corrective actions:

- i) The lateral distance from lower hitch point to centre line of tractor has been measured as 363 mm against the requirement of 359 mm.
- ii) The distance from end of power take-off to centre of lower hitch point has been measured as 590 mm against the requirement of 450 to 575 mm.

6.4.1.3 Operator's seat:

The following parameters do not meet the requirement of IS: 12343-2021.

- i) Provision for adjustment of driver's mass has been specified as 50 to 120 kg against the requirement of 40 to 100 kg.
- ii) Vertical distance from SIP to centre of accelerator pedal has been measured as 510 mm against the requirement of 230 to 460 mm.
- iii) Longitudinal distance from SIP to centre of steering control wheel has been measured as 565 mm against the requirement of 425 to 525 mm.
- iv) Vertical distance from SIP to centre of steering control wheel has been measured as 230 mm against the requirement of 265 to 385 mm.
- v) Vertical distance from SIP to foot rest has been measured as 560 mm against the requirement of 450 to 520 mm.

Therefore, all of the above parameters should be looked into for necessary corrective action.

6.4.1.4 Operator's work place:

The following parameters does not meet the requirement of IS: 12239 (Part-I) -2018.

- i) A vertical retainer on inner side of clutch pedal has not been provided.
- ii) Spark arresting device has not been provided in the exhaust system.
- iii) Width of foot step has been measured as 190 mm against the minimum requirement of 200 mm.

Therefore, all of the above should be looked into for necessary corrective action.

6.4.1.5 PTO master shield:

PTO master shield has not been provided on tractor as IS: 12239 (Part-II) -1999. This should be looked into for necessary corrective action.

6.4.1.6 Maximum speed in reverse gears (*):

***The maximum traveling speed at rated engine speed in reverse gears in RH3 & RH4 was recorded as 24.79 & 34.65 kmph respectively. The audible warning signal has not been fitted on the tractor & accordingly does not meet the evaluative requirement of IS:12207-2022.This should be looked into for necessary corrective action.**

6.4.1.7 Specification of Tractor

Discrepancies in the specification between the Specification sheet and Operator's manual are as under:

S. No.	Description	As per Specification Sheet	As per Operator's manual
i)	Hydraulic lift capacity at hitch point, kN	16.5	15.5 (P. No. 112)
ii)	Brand name of coolant	Total Oil India Pvt. Ltd	Not specified

6.5 Maintenance / Service Problems:

No noticeable maintenance or service problem was observed during the test.

6.6 Recommendation with regard to safety on tractor:

- (i) Identification of hand controls by colour has not been provided as per the requirement as laid down in Table – 5 of IS: 8133-2021.
- (ii) Colour code for engine oil pressure (yellow -amber), fuel level (Yellow -amber) & water temperature gauge has not been provided as per the requirement of IS: 6283-Part-2-2007.
- (iii) The working clearance between tipping brake lever & operator's seat have been measured as 30 mm against the minimum requirement of 70 mm as per the requirement of IS: 12239 (Part II) - 2019.

T-1759/2290/2023	TAFE, MF 244 DI 4WD DT TRACTOR - INITIAL COMMERCIAL TEST
	THIS TEST REPORT IS VALID UPTO: 31/07/2028

(iv) The hand accelerator lever, when moved away from the operator (i.e., forward) decreases the engine speed, which does not meet the requirement as laid down in Table – 1 of IS: 8133-2021.

(v) The working clearance between draft control lever & position control lever RHS mudguard have been measured as 40 mm both against the minimum requirement of 70 mm as per the requirement of IS: 12239 (Part II) - 2019.

Above parameters should be looked into for necessary corrective action.

6.7 Adequacy of Literature supplied with machine:

6.7.1 The following literatures were supplied with the test tractor for reference during the test: -

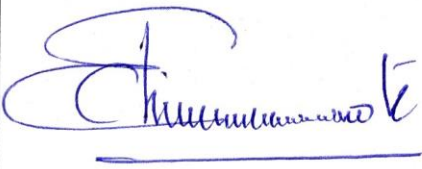

- a) Operator Instruction Book for "TAFE, MF 244 DI 4WD DT" tractor model.
- b) Parts Book for "TAFE, MF 244 DI 4WD DT" tractor model.
- c) Service manual for "TAFE, MF 244 DI 4WD DT" tractor model.

6.7.2 The operator manual may be brought out for the guidance of users and service personnel as per IS: 8132-1999 incorporating, inter alia, the following:

- i) Details technical specification of tractor such as PTO power, drawbar power & pull & hydraulic lift capacities should be provided in the operator's manual.
- ii) Recommended brand name of coolant
- iii) Specifications of recommended matching implements
- iv) Recommended ballast masses for different operations.

TEST CARRIED OUT AT C.F.M.T. & T.I., BUDNI (M.P.), INDIA

TESTING AUTHORITY

C. V. CHIMOTE TEST ENGINEER	
A. K. UPADHYAY DIRECTOR (I/C)	

Draft Test Report compiled by Chanchlesh Singh Raghuwanshi, Agricultural Engineer.

T-1759/2290/2023	TAFE, MF 244 DI 4WD DT TRACTOR - INITIAL COMMERCIAL TEST
	THIS TEST REPORT IS VALID UPTO: 31/07/2028

7.APPLICANT'S COMMENTS

Para no.	Our reference	Applicant comments
7.1	6.4.1.1 & 6.4.1.2	Parameters will be studied and necessary corrective action will be initiated.
7.2	6.4.1.3,6.4.1.4,6.4.1.5,6.4.1.7,6.6 & 6.7.2	

ANNEXURE-I

TRACTOR RUN HOURS DURING TEST

A.	LABORATORY AND TRACK TESTS:	HOURS
1.	Running-in	Applicant has declared it to be conducted on their work place.
2.	PTO performance test	22.5
3.	Power lift and hydraulic pump performance test	3.4
4.	Drawbar performance test	4.7
5.	Brake performance test	1.3
6.	Nominal speed test	3.1
B.	Miscellaneous test and other run hours including idle run, transportation, trials and preparation for test	0.5
TOTAL:		35.5