

प्रारंभिक व्यावसायिक परीक्षण रिपोर्ट
INITIAL COMMERCIAL TEST REPORT

संख्या/No. : T-1755/2286/2023
माह/Month : July, 2023

Application Reference No. 28/2022-23/97

(यह परीक्षण रिपोर्ट 31/07/2028 तक वैध है /THIS TEST REPORT IS VALID UPTO 31/07/2028)



Make of Agricultural Tractor : John Deere
Model : 5210 4WD GearPro V1
Manufactured by : John Deere India Private Limited,
Gat No.166-167 & 271-291,
Off. Pune-Nagar Road, Sanaswadi, Taluka
shirur, District Pune – 412 208.



भारत सरकार

कृषि एवं किसान कल्याण मंत्रालय
(कृषि एवं किसान कल्याण विभाग)

GOVERNMENT OF INDIA
MINISTRY OF AGRICULTURE AND FARMERS WELFARE
(DEPARTMENT OF AGRICULTURE & FARMERS WELFARE)

केन्द्रीय कृषि मशीनरी प्रशिक्षण एवं परीक्षण संस्थान
ट्रैक्टर नगर, बुदनी (म.प्र.) 466 445

CENTRAL FARM MACHINERY TRAINING & TESTING INSTITUTE
TRACTOR NAGAR, BUDNI (M.P.) 466 445
(An ISO 9001:2015 Certified Institute)

E-mail: fmti-mp@nic.in

Web site: <http://www.fmttibudni.gov.in>

Telephone: 07564-299003

T-1755/2286/2023	JOHN DEERE, 5210 4WD GEARPRO V1 - INITIAL COMMERCIAL TEST
	THIS TEST REPORT IS VALID UPTO: 31/07/2028

IMPORTANT INFORMATION

The Government of India, Ministry of Agriculture and Farmers' Welfare has directed, vide an OM No. 13-17/2021-M&T (I&P) dated 28.07.2022, that since 15th August, 2022, only mandatory tests will be carried out on a tractor unless applicant has expressly requested for optional tests as well, mentioned in the above captioned OM.

In the instant case, there is no request from the applicant to carry out the optional tests hence only Mandatory Tests, as given below, have been conducted and reported in this report: -

1. PTO performance
2. Hydraulic performance
3. Drawbar performance
4. Brake performance

Month: July	Test Report No.: T-1755/2286/2023	Year: 2023
-------------	-----------------------------------	------------



GOVERNMENT OF INDIA
CENTRAL FARM MACHINERY TRAINING & TESTING INSTITUTE
TRACTOR NAGAR, BUDNI (MADHYA PRADESH) 466445, INDIA

E-mail: fmti-mp@nic.in

Web site: <http://www.fmttibudni.gov.in>

Telephone: 07564-299003

CENTRAL FARM MACHINERY TRAINING AND TESTING INSTITUTE – BUDNI	Page 2 of 34
---	--------------

T-1755/2286/2023	JOHN DEERE, 5210 4WD GEARPRO V1 - INITIAL COMMERCIAL TEST
	THIS TEST REPORT IS VALID UPTO: 31/07/2028

[C]	Tractor manufacturer's name and address	:	John Deere India Private Limited, Gat No.166-167 & 271-291, Off. Pune-Nagar Road, Sanaswadi, Taluka shirur, District Pune – 412 208.
[D]	Location of tractor assembly	:	John Deere India Private Limited (i) Gat No.166-167 & 271-291, Off. Pune-Nagar Road, Sanaswadi, Taluka shirur, District Pune – 412 208. (ii) Survey No.501,Village- Khatamba Jamgod, Dewas Bhopal Highway, Dewas (Madhya Pradesh)-455 115
[C]	Submitted for test by (Applicant)	:	The Manufacturer
[C]	Selected for test by	:	The Ministry vide OM No. 13-17/2021 - M&T (I&P) dated 28.07.2022, has allowed the applicant to submit the test sample directly to the Institute without requiring any random selection for Initial Commercial Testing. Thus, the applicant directly submitted the test sample to the Institute for test.
[D]	Place of running-in	:	At manufacturer's works
[D]	Duration of running-in (h):	:	
	-Engine	:	12
	-Transmission	:	12
[C]	Location of test	:	Government of India, Central Farm Machinery Training and Testing Institute, P.O. - Tractor Nagar, BUDNI – 466445 (M.P.), INDIA

1. SPECIFICATIONS OF TRACTOR

1.1 Identification:

1.1.1 Denomination

[C]	Make of tractor	:	JOHN DEERE
[C]	Model (trade name)	:	5210 4WD GEARPRO V1
[C]	Type	:	Four Wheel Drive, Standard Agricultural Tractor.
[C]	Month & year of manufacture	:	12 & 22
[D]	Country of origin	:	India

1.1.2 Numbers:

[D]	1 st Serial No. of prototype	:	1PY5210ECNA011949
[C]	Serial No.	:	1PY5210ELNA013509

1.2 Engine:

[D]	Manufacturer's address	:	John Deere India Private Limited i) Gat No.166-167 & 271-291, Off. Pune-Nagar Road, Sanaswadi, Taluka shirur, District Pune – 412 208.. ii) Survey No.501,Village- Khatamba Jamgod, Dewas Bhopal Highway, Dewas (Madhya Pradesh)-455 115
[C]	Make	:	JOHN DEERE INDIA PVT LTD
[C]	Model	:	3029TPY74
[C]	Type	:	Four stroke, turbo charged, liquid cooled, direct injection, diesel engine.
[C]	Serial No.	:	PY3029T311226

T-1755/2286/2023	JOHN DEERE, 5210 4WD GEARPRO V1 - INITIAL COMMERCIAL TEST
	THIS TEST REPORT IS VALID UPTO: 31/07/2028

6. SUMMARY OF OBSERVATIONS, COMMENTS & RECOMMENDATIONS

6.1 On the basis of test conducted the performance results have been summarized as evaluative (mandatory) / Non-evaluative (Non-mandatory) parameters applicable for Qualifying Minimum Performance criteria as per Clause-4 (Table-1) of IS: 12207-2022 for acceptance of the tractor for the purpose of subsidies/NABARD financing are summarized as under:

S. No.	Characteristic	Category (Evaluative / Non Evaluative)	Requirements as per IS: 12207-2022	Values declared by the applicant/ (D) Requirement (R)	As observed	Whether meets the requirements (Yes/No)
1	2	3	4	5	6	7
MANDATORY TESTS: (As per Ministry's Office Memorandum No. 13-17/2021-M&T (I&P) dated 28th of July, 2022).						
6.1.1	PTO Performance:					
a)	Maximum power under 2 h test, (kW) (Natural ambient condition)	Evaluative	Declared value to be achieved with a tolerance of: $\pm 5\%$ for PTO power and or engine power > 26 kW. $\pm 10\%$ for PTO power and or engine ≤ 26 kW.	31.3 (D)	31.1	Yes
b)	Power at rated engine speed, (kW)	Non Evaluative	-do-	31.3 (D)	31.1	Yes
c)	Specific fuel consumption corresponding to maximum power, (g/kWh)	Evaluative	Should not be more than 10% of declared value.	270 (D)	273	Yes
d)	Maximum equivalent crankshaft torque, (Nm)	Non Evaluative	$\pm 8\%$	230 (D)	197.3	No
e)	Back-up torque, percent	Evaluative	Should be min. 12%	12 (D) 12 (R)	39.6	Yes
f)	Maximum operating temperature, ($^{\circ}\text{C}$):					
	1) Engine oil	Evaluative	The declared value should not exceed the Max value specified by the oil company and the observed value under natural ambient/high ambient condition should not exceed the declaration.	135 (D)	118	Yes
	2) Coolant	Evaluative	Observed value should not exceed the declared value or boiling point of coolant at radiator cap pressure whichever is lower. The boiling point of the coolant at radiator pressure shall be provided by the applicant.	118 (D)	106	Yes
g)	Engine oil consumption, (g/kWh)	Evaluative	Not exceeding 1% of SFC at Max power under natural ambient condition. The value would be based on the test conducted under natural ambient condition	2.73 Maximum (R)	0.41	Yes
h)	Smoke level, m^{-1}	Evaluative	Maximum light absorption coefficient of 3.25 per meter or equivalent BOSCH No. 5.2 or 75 Hatridge value (As per CMVR). Max Smoke level shall be reported out of 6 readings tested as per IS 12062 and observed value should be well within the required limits.	3.25 per meter Maximum (R)	0.37	Yes

T-1755/2286/2023	JOHN DEERE, 5210 4WD GEARPRO V1 - INITIAL COMMERCIAL TEST
	THIS TEST REPORT IS VALID UPTO: 31/07/2028

1	2	3	4	5	6	7	
6.1.2 Drawbar performance:							
a)	Max. drawbar pull with ballast corresponding to 15 percent wheel slip, (kN)	Non Evaluative	Minimum 70% of static mass of tractor with ballast.	22.82 (D)	*	*	
				*			
b)	Max. drawbar pull without ballast corresponding to 15 percent wheel slip, (kN)	Evaluative	In case of tractors having total static mass \geq 1500 kg, Min 70% of static mass of tractor without ballast or with standard ballast, as the case may be. In case of light weight tractors having \leq 1500 kg total static mass of tractor, Min. 65% of static mass of tractor without ballast or with standard ballast, as the case may be.	16.41 (D)	22.31	Yes	
				16.41 (R) Minimum			
c)	Maximum drawbar power without ballast, (kW).	Evaluative	Minimum 80 % of PTO power as referred in SI No. i) a) of PTO performance in case of tractors having total static mass > 1500 kg Minimum 75% of PTO power as referred in SI No. i) a) of PTO performance in case of light weight tractors having \leq 1500 kg total static mass of tractor. Minimum 75 % of the engine power as referred in SI No. i) a) of engine performance in case of tractors which do not have a PTO shaft.	25.04 (D)	29.4	Yes	
				24.9 (R) Minimum			
d)	Maximum transmission oil temperature, ($^{\circ}$ C)	Evaluative	The declared value should not exceed the recommendation by the oil manufacturer. The observed value should not exceed the declared value throughout the drawbar test.	120 (D)	100	Yes	
*Applicant vide letter no. Nil dated 29.05.2023 has requested not to conduct the ballasted drawbar performance & ten-hour drawbar test which was allowed as per the additional guidelines for testing of tractors as per new regime of testing of tractors vide a OM No. 13-32/2023-M&T(I&P) (FTS-125476) dated 16.05.2023. Accordingly, only unballasted drawbar performance test was conducted.							
6.1.3 Power lift and hydraulic pump performance:							
a)	Maximum lifting capacity throughout the range of lift, (kN):						
	1)	At hitch points	Evaluative	Should not be less than 90% of declared value.	19.31 (D)	21.03	Yes
					17.38 (R) Minimum		
	2)	With the standard frame	Evaluative	The lift capacity should at least be 24 kg/PTO kW and it should be 21.5 kg/engine kW where the tractor is not provided with a PTO shaft.	15.50 (D)	14.48	Yes
7.32 (R) Minimum							

T-1755/2286/2023	JOHN DEERE, 5210 4WD GEARPRO V1 - INITIAL COMMERCIAL TEST
	THIS TEST REPORT IS VALID UPTO: 31/07/2028

1	2	3	4	5	6	7
b)	Maximum drop in the height of the point of application of the force after each 5 minutes interval for a total duration of 30 Minutes, (mm)	Non Evaluative	The observed value should not exceed 50 mm.	50 (D) Maximum	00	Yes
6.1.4	Brake performance at 25 kmph:					
a)	Maximum stopping distance at a force, equal to or less than 600 N on brake pedal with road ballast, (m):					
	1) Cold brake	Evaluative	10	10 (R)	8.11	Yes
	2) Hot brake	Evaluative	10	10 (R)	8.18	Yes
b)	Whether parking brake is effective at a force of 600 N at foot pedal (s) or 400 N at hand lever	Evaluative	Yes / No	Yes	Yes	Yes
6.1.5	OPTIONAL TESTS: As the applicant has not applied for any optional tests, therefore no optional tests was conducted.					
6.1.6	Safety features:					
a)	Guards against moving and hot parts	Evaluative	Belt drives, pulleys, silencer, hydraulic pipes [As per IS 12239 (Part2)]	Meets the requirement		Yes
b)	Lighting arrangement	Evaluative	As per CMVR	Conforms		Yes
c)	Seating requirements (Tractors having more than 1150 mm rear track width)	Non Evaluative	Should meet the requirements of IS: 12343 (As amended from time to time)	Does not meet the requirement		No
d)	Technical requirements for PTO shaft	Non Evaluative	Should meet the requirements of IS: 4931 (As amended from time to time)	Meets the requirement		Yes
e)	Dimensions of three point linkage	Non Evaluative	Should meet the requirements of IS: 4468 (Part-I) (As amended from time to time)	Does not meet the requirement		No
f)	Specifications of linkage drawbar	Non Evaluative	Should meet the requirements of IS: 12953 (As amended from time to time)	Meets the requirement		Yes
g)	Swinging drawbar (wherever fitted)	Non Evaluative	Should meet the requirement of IS: 12362 (Part 3) (As amended from time to time)	Not provided		Not applicable
h)	Audible warning signal on tractor	Evaluative	If tractor travel speed in reverse gear exceeds 20 kmph, an audible warning signal on tractor shall get activated. A sticker to the effect that "operating the tractor beyond 20 kmph speed in reverse gear is not safe" should be prominently displayed.	Not fitted		Not applicable

T-1755/2286/2023	JOHN DEERE, 5210 4WD GEARPRO V1 - INITIAL COMMERCIAL TEST
	THIS TEST REPORT IS VALID UPTO: 31/07/2028

1	2	3	4	5	6	7	
6.1.7	Labelling of tractors (Provision of labelling plate):						
	1) Make	Evaluative	Should conform to the requirements of CMVR along-with declared value of PTO in kW, Specific fuel consumption (SFC) corresponding to maximum power in g/kWh and year of manufacture in numerical form MM YY Digit 01-12 in box No. 1 for MM will represent the month and next two digit in the box No. 2 for YY will represent the year of manufacturing.		JOHN DEERE	Yes	
	2) Model	Evaluative				5210 4WD GEARPRO V1	Yes
	3) Month & Year of manufacture	Evaluative				12 & 22	Yes
	4) Engine number	Evaluative				PY3029T311226	Yes
	5) Chassis number	Evaluative				1PY5210ELN A013509	Yes
	6) Maximum PTO power, (kW)	Evaluative				31.5	Yes
	7) Specific fuel consumption, (g/kWh)	Evaluative				270	Yes
6.1.8	Literature (Submission to test agency):						
(a)	Operator manual	Evaluative	The printed literature in booklet form should be provided as per IS 8132 and should submit along with the test sample.		Provided	Yes	
(b)	Parts Catalogue	Evaluative			Provided	Yes	
(c)	Workshop/ Service manual	Evaluative			Provided	Yes	
6.1.9	Fitment of Roll Over Protective Structures (ROPS):						
	For tractor having more than 1150 mm rear track width	Evaluative	ROPS should meet the requirement of IS:11821 or OECD code or equivalent International Standard.		Not fitted	Not applicable	
6.1.10	Standard Accessories	Evaluative	Trailer hitch, front tow hook, linkage drawbar should be provided with tractor		Provided	Yes	
6.1.11	Accessories (optional)	Non Evaluative	Ballast weight, if fitted, should meet the requirement of CMVR		Not fitted	Not applicable	
6.2	CATEGORY OF BREAKDOWNS / DEFECTS (As per clause 5.0 of IS:12207-2022):						
S. No.	Category of break-downs	Category (Evaluative / Non Evaluative)	Requirements as per IS: 12207-2022	As observed	Whether meets the Requirement (Yes/No)		
1.	Critical	Evaluative	There is no 'critical breakdown' during the course of testing.	None	Yes		
2.	Major	Evaluative	There are not more than 2 major breakdowns and neither of them should be of repetitive nature.	None	Yes		
3.	Minor	Evaluative	There are not more than 5 minor defects during the test and neither of them should of repetitive nature.	None	Yes		
4.	Total breakdowns	Evaluative	In no case, the total number of breakdowns should exceed five that is, (2 major + 3 minor) or (1 major + 4 minor) or 5 minor breakdowns.	None	Yes		

6.3 Conformity with following IS:

- | | | | |
|-------|--|---|-------------------------|
| i) | Guidelines for declaration of power and specific fuel consumption and labeling of agricultural tractors (First revision) [IS:10273 -1987 (Reaffirmed Year 2019)] | : | Conforms |
| ii) | Agricultural tractors - Rear mounted power take-off - Types 1, 2 and 3 (third revision) [IS:4931-1995 (Reaffirmed Year 2019)] | : | Conforms |
| iii) | Agricultural wheeled tractors – Rear mounted three-point linkage: Part 1 Categories 1, 2, 3 & 4 (fourth revision) [IS:4468(Part-I) – 1997 (Reaffirmed in 2022)] | : | Does not conform |
| iv) | Drawbar for agricultural tractors – Link type [IS 12953:1990 (Reaffirmed Year 2022)] | : | Conforms |
| v) | Agricultural tractors- Operator’s seat technical requirement [IS12343 - 2021] | : | Does not conform |
| vi) | Guide for safety & comfort of operator of agricultural tractors: Part 1 General requirements (first revision): [IS 12239 (Part 1) - 2018] | : | Does not conform |
| vii) | Tractors and machinery for agriculture and forestry – Technical means for ensuring safety Part 2: Tractors (first revision) (IS 12239 (Part 2) 1999) (Reaffirmed Year 2019)] | : | Does not conform |
| viii) | Guide lines for location and operation of operator controls on agricultural tractors and machinery [IS: 8133 - 2021] | : | Does not conform |
| ix) | Tractors and machinery for agriculture and forestry, powered lawn and garden equipment - Symbols for operator controls and other displays Part2 Symbols for agricultural tractors and machinery [IS: 6283(Part-1) - 2006 (Reaffirmed Year 2019) and IS: 6283 (Part-2) – 2007 (Reaffirmed Year 2019)] | : | Does not conform |
| x) | Agricultural Tractors and Machinery-Lighting device for travel on public roads (IS:14683-1999) (Reaffirmed Year 2019)] | : | Conforms |

6.4 Salient Observations:

6.4.1 Laboratory tests:

6.4.1.1 PTO performance:

The maximum equivalent crankshaft torque was recorded as **197.3 Nm** against the declaration of **230 Nm**, which is not within the permissible limit as specified in IS: 12207-2022. This should be looked into for corrective action.

6.4.1.2 Three-point linkage:

The following parameters does not meet the requirements of IS: 4468 (Part-I) – 1997 and needs to be looked into for necessary corrective actions:

The dimensions viz. diameter of hitch pin hole & width of ball of upper hitch points, diameter of hitch pin hole & width of ball of lower hitch points, lateral distance from lower hitch point to centre line of tractor and lateral movement of lower hitch points does not meet the requirements of IS:4468 (Part-I) – 1997.This should be looked into for corrective action.

6.4.1.3 Operator’s seat:

The following parameters do not meet the requirement of IS: 12343-2021.

- | | |
|-----|---|
| i) | Provision for adjustment of driver’s mass has been specified as 50 to 120 kg against the requirement of 40 to 100 kg. |
| ii) | Longitudinal distance from SIP centre of steering control wheel has been measured as 540 mm against the requirement of 425 to 525 mm. |

iii) Vertical distance from SIP to centre of steering control wheel has been measured as 220 mm against the requirement of 265 to 385 mm.

Therefore, all of the above should be looked into for necessary corrective action.

6.4.1.4 Operator's work place:

The following parameters does not meet the requirement of IS: 12239 (Part-I) -2018.

i) Vertical retainers on inner side of clutch pedal are not provided.

Therefore, all of the above should be looked into for necessary corrective action.

6.4.1.6 Discrepancies in the specification between the Specification sheet and Operator's manual are as under:

S.No.	Description	As per Specification Sheet	As per Operator's manual
a)	Transmission oil change period	First change after 1000 hours of operation and subsequently after every 1250 hours of operation.	First change after 1100 hours of operation and subsequently after every 1250 hours of operation. (P. No. 90-5)

6.5 Maintenance / Service Problems:

No noticeable maintenance or service problem was observed during the test.

6.6 Recommendation with regard to safety on tractor:

i) Identification of hand control by colour coding of differential locks (yellow colour) has not been provided as per the requirement as laid down in Table – 5 of IS: 8133-2021.

ii) Colour code for, engine oil pressure has not been provided as per the requirement of IS: 6283-Part-2-2007.

iii) The working clearance between draft control lever & RHS mudguard and between PTO engaging lever & LHS mudguard have been measured as 45 mm both against the minimum requirement of 70 mm as per the requirement of IS: 12239 (Part II) - 2019.

Above parameters should be looked into for necessary corrective action.

6.7 Adequacy of Literature supplied with machine:

6.7.1 The following literatures were supplied with the test tractor for reference during the test: -

a) Operator Manual for "John Deere,5310,5050E, 5210 GearPro V1, 5210 4WD GearPro V1, 5055E,5060E,5060E,5075E & 5405 tractor models.

b) Parts catalogue for "John Deere,5310,5050E, 5210 GearPro V1, 5210 4WD GearPro V1, 5055E,5060E,5060E,5075E & 5405 tractor models.

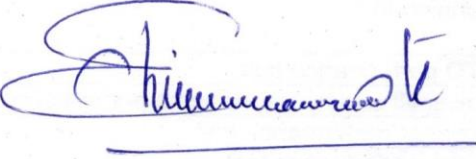

c) Service manual for "John Deere,5310,5050E, 5210 GearPro V1, 5210 4WD GearPro V1, 5055E,5060E,5060E,5075E & 5405 tractor models.

6.7.2 The operator manual may be brought out for the guidance of users and service personnel as per IS: 8132-1999 incorporating, inter alia, the following:

i) Recommended ballast masses for different operations.

T-1755/2286/2023	JOHN DEERE, 5210 4WD GEARPRO V1 - INITIAL COMMERCIAL TEST
	THIS TEST REPORT IS VALID UPTO: 31/07/2028

TEST CARRIED OUT AT C.F.M.T. & T.I., BUDNI (M.P.), INDIA
TESTING AUTHORITY

C. V. CHIMOTE TEST ENGINEER	
A. K. UPADHYAY DIRECTOR (I/C)	

Draft Test Report compiled by **Sh. Dharmendra Kumar**, Senior Technical Assistant & **Sh. C.S. Raghuwanshi**, Agricultural Engineer

7. APPLICANT'S COMMENTS

Para no.	Our reference	Applicant comments
7.1	6.4.1.6 (a)	Your valuable comments & suggestion, for improvements are well taken. Under our policy of continuous product improvement these aspects are further being looked into & will take appropriate actions to eliminate this deviation soon wherever necessary.

T-1755/2286/2023	JOHN DEERE, 5210 4WD GEARPRO V1 - INITIAL COMMERCIAL TEST
	THIS TEST REPORT IS VALID UPTO: 31/07/2028

ANNEXURE - I

TRACTOR RUN HOURS DURING TEST

A.	LABORATORY AND TRACK TESTS:	HOURS
1.	Running-in	Applicant has declared it to be conducted on their work place.
2.	PTO performance test	12.24
3.	Power lift and hydraulic pump performance test	2.6
4.	Drawbar performance test	5.2
5.	Brake performance test	1.8
6.	Nominal speed test	2.6
B.	Miscellaneous test and other run hours including idle run, transportation, trials and preparation for test	0.5
TOTAL:		24.9